

**TKV-084-MODUL**



**Features and benefits:**

- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

**Specification**


Number of Keys: 84  
 Keyswitch Technology: silicone switching element  
 Actuation Force/-Travel: 1 N / 1,5 mm  
 Keyswitch Lifetime: 10 mil. operations  
 Protection Level: IP65; NEMA 4x  
 Mounting Type: panel mount  
 Dimensions: 295 x 145 x 30 mm; 11.614" x 5.708" x 1.181"  
 Weight: 1700 g  
 Operating Temperature: -40 °C to 90 °C; -40 °F to +194 °F  
 Frontplate Material: stainless steel

Cat.-No.	Product Name	
KV01209	TKV-084-MODUL-PS/2-US	PS/2; US-Layout; compact version
KV01215	TKV-084-MODUL-USB-US	USB; US-Layout; compact version
KY13000	TKY-084-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

**TKV-084-MODUL**

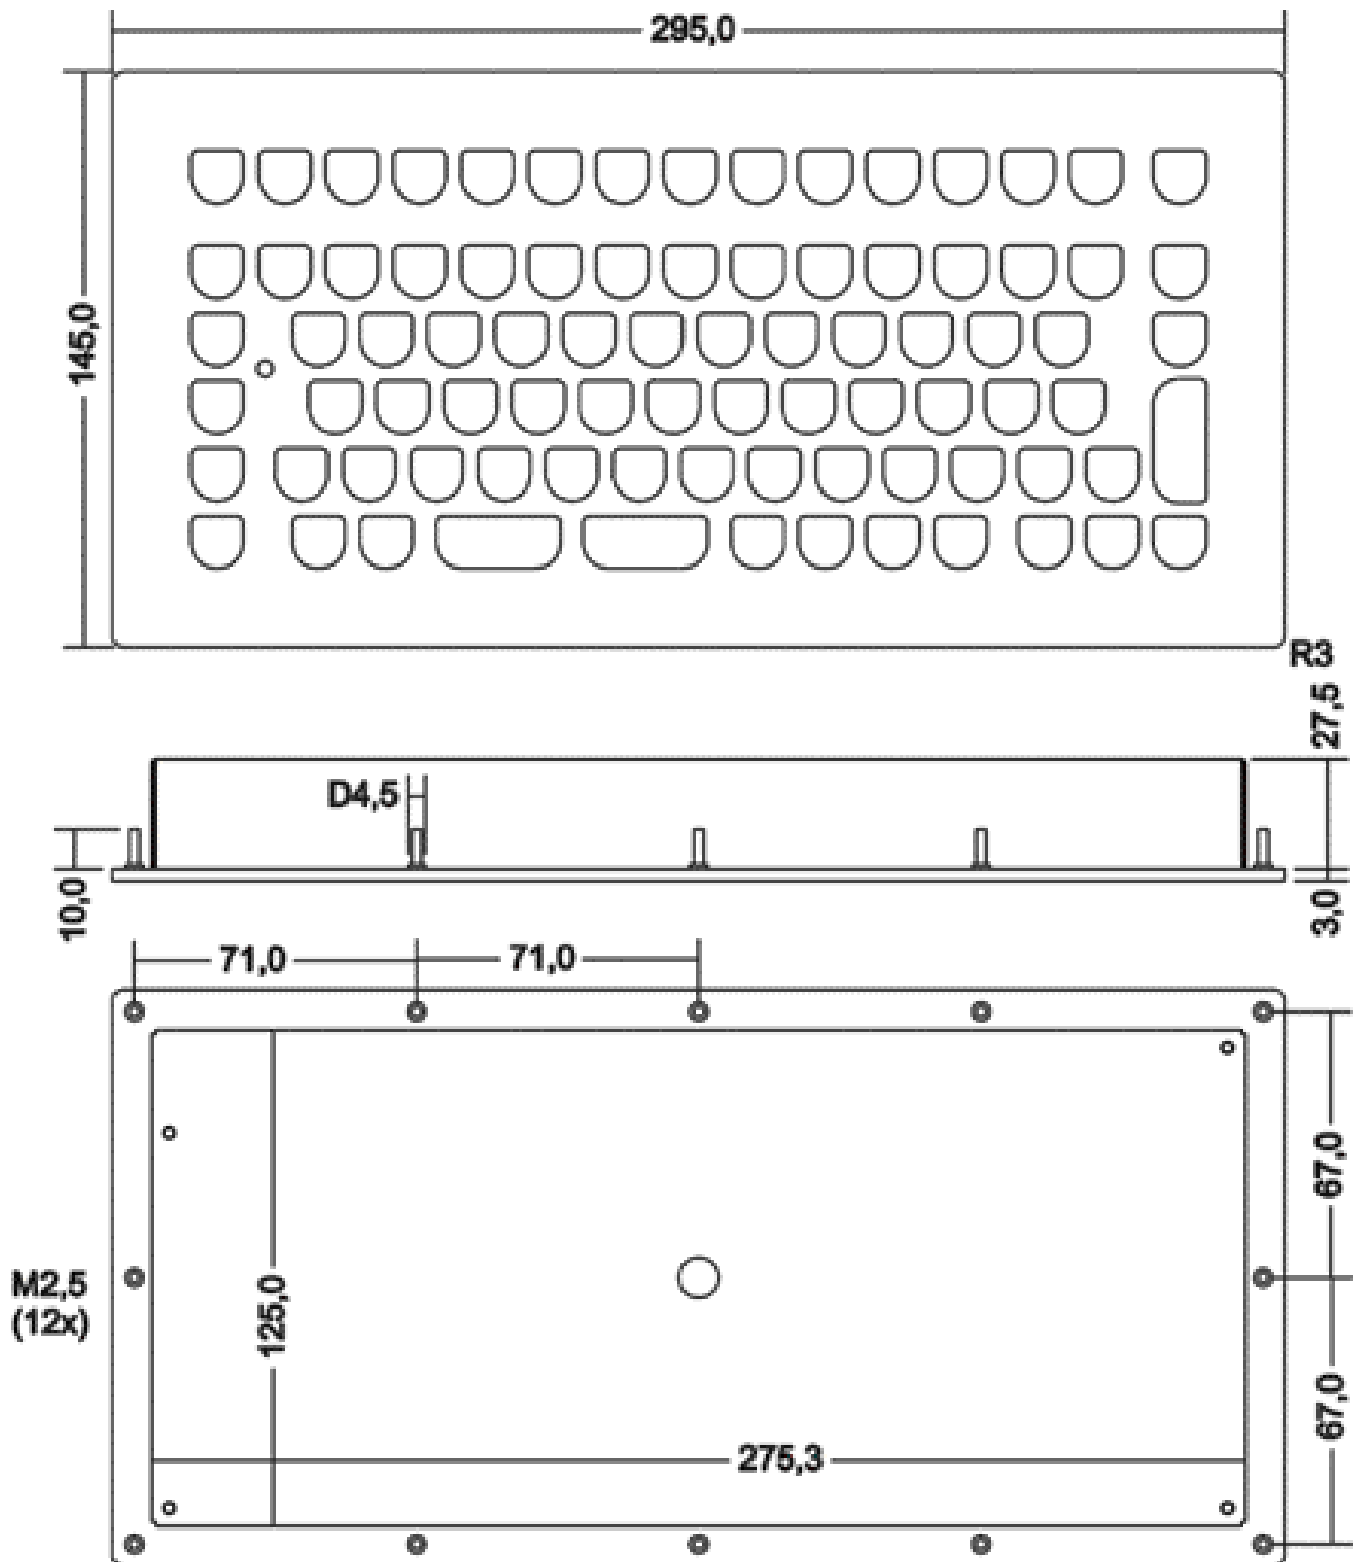

**TKV-084-TB25V-MODUL**



**Features and benefits:**

- Stainless steel keyboard with integrated 25 mm trackball
- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

**Specification Keyboard**

Number of Keys: 84  
 Keyswitch Technology: silicone switching element  
 Actuation Force/-Travel: 1 N / 1,5 mm  
 Keyswitch Lifetime: 10 mil. operations  
 Protection Level: IP65; NEMA 4x  
 Mounting Type: panel mount  
 Dimensions: 370 x 145 x 33 mm;  
 14.566" x 5.708" x 1.299"  
 Weight: 2200 g  
 Operating Temperature: -40 °C to 90 °C;  
 -40 °F to +194 °F  
 Frontplate Material: stainless steel


**Specification Trackball**

Ball Diameter: 25 mm; 1"  
 Actuation Force: 65 g  
 Protection Level: IP65 static; NEMA 3  
 IP54 dynamic



Cat.-No.	Product Name	
KV01211	TKV-084-TB25V-MODUL-PS/2-US	PS/2; US-Layout; with trackball
KV01217	TKV-084-TB25V-MODUL-USB-US	USB; US-Layout; with trackball
KY13001	TKY-084-TB25V-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

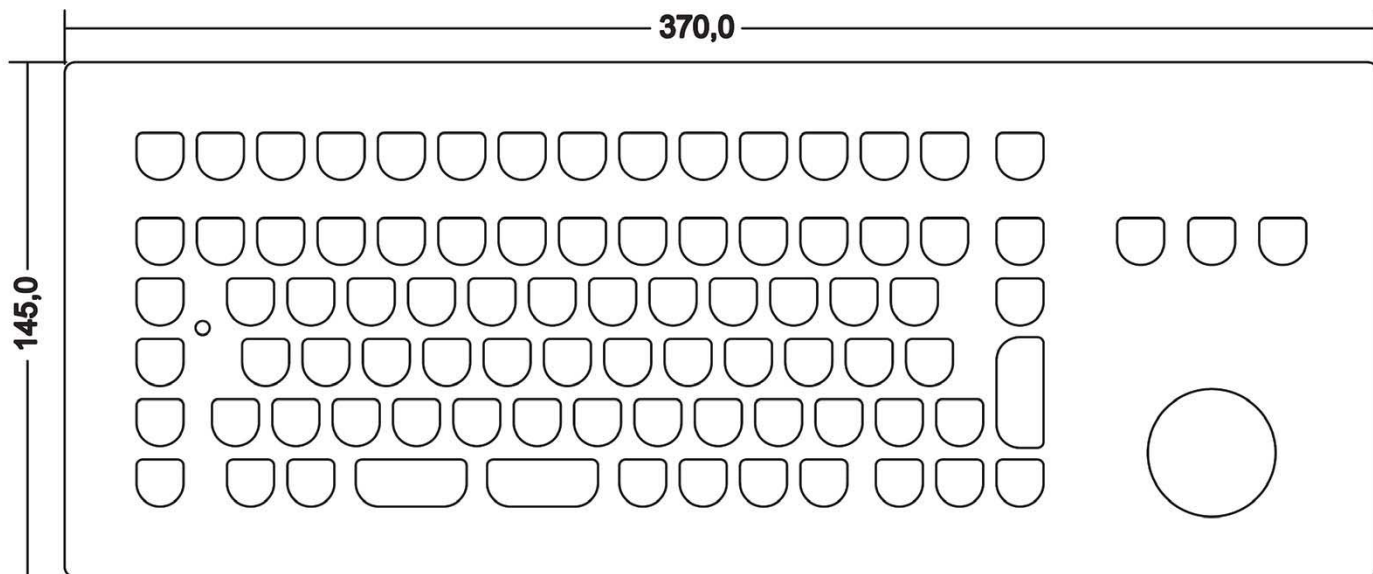

R3

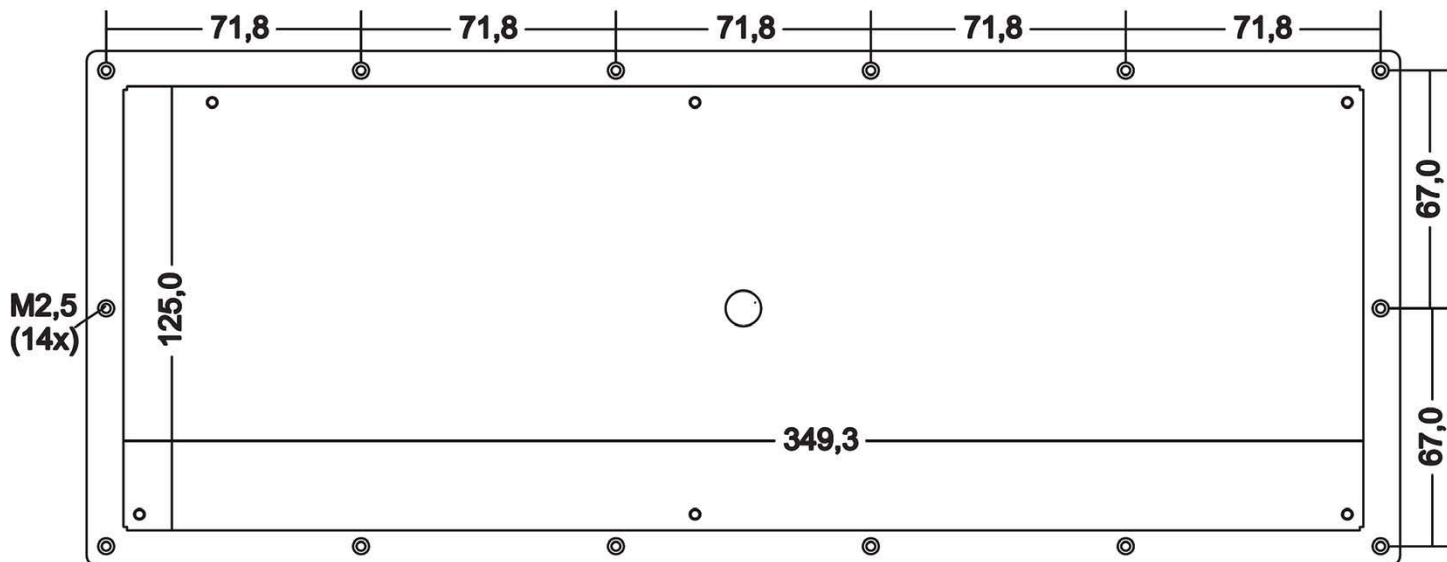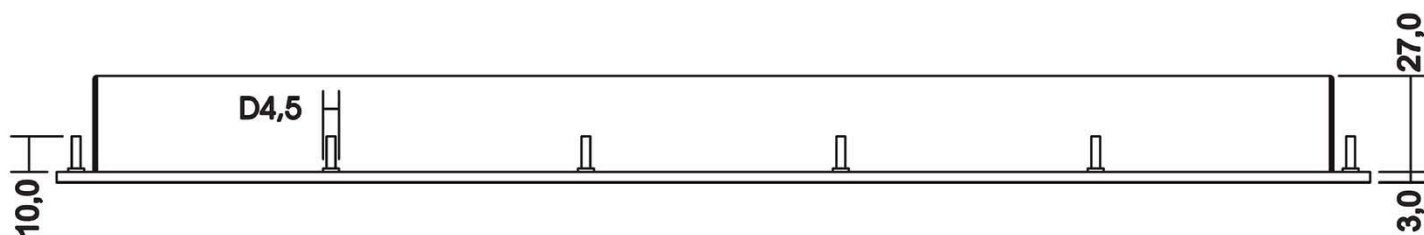

**TKV-084-TOUCH-MODUL**



**Features and benefits:**

- Stainless steel keyboard with integrated touchpad
- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

**Specification Keyboard**

Number of Keys: 84  
 Keyswitch Technology: silicone switching element  
 Actuation Force/-Travel: 1 N / 1,5 mm  
 Keyswitch Lifetime: 10 mil. operations  
 Protection Level: IP65; NEMA 4x  
 Mounting Type: panel mount  
 Dimensions: 385 x 145 x 30 mm;  
 15.16 x 5.7 x 1.18"  
 Weight: 2200 g  
 Operating Temperature: -40 °C to 90 °C;  
 -40 °F to +194 °F  
 Frontplate Material: stainless steel

**Specification Touchpad**

Motion Detection  
 Method: capacitive  
 Active Area: 60 x 44 mm  
 Protection Level: IP65; NEMA4x

Cat.-No.	Product Name	
KV13001	TKV-084-TOUCH-MODUL-PS/2-US	PS/2; US-Layout; with touchpad
KV13003	TKV-084-TOUCH-MODUL-USB-US	USB; US-Layout; with touchpad
KY13004	TKY-084-TOUCH-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

